


- DATA & SECURITY ROUGH-IN NOTES:**
1. PROVIDE CONDUITS FROM SERVER CHASE TO CAMERA AND DATA OUTLETS AS SHOWN. COORDINATE EXACT LOCATION AND HEIGHT WITH OWNER.
  2. LEAVE PULL STRING IN ALL CONDUITS.
  3. TERMINATE CONDUIT RUNS WITH BUSHINGS.
  4. UNDERGROUND CONDUIT SHALL BE PVC.
  5. PROVIDE LADDER CABLE TRAY IN SERVER CHASE.
  6. PROVIDE 4" X 4" 3/4" FIRE RATED TERMINAL BACKBOARD IN SERVER CHASE. COORDINATE LOCATION AND HEIGHT WITH OWNER.
  7. COORDINATE ALL DATA AND SECURITY ROUGH-IN IN SERVER CHASE WITH PLUMBING PIPING.
  8. PROVIDE BLOCKING FOR CAMERA MOUNTING.
  9. PROVIDE 4" PVC CONDUIT FOR DATA SERVICE ENTRY. EXTEND CONDUIT TO 15' OUTSIDE BUILDING. COORDINATE EXACT LOCATION WITH OWNER OR DESIGNATED DATA SERVICE PROVIDER.


○ DATA & SECURITY ROUGH-IN  
3/4" = 1'-0"

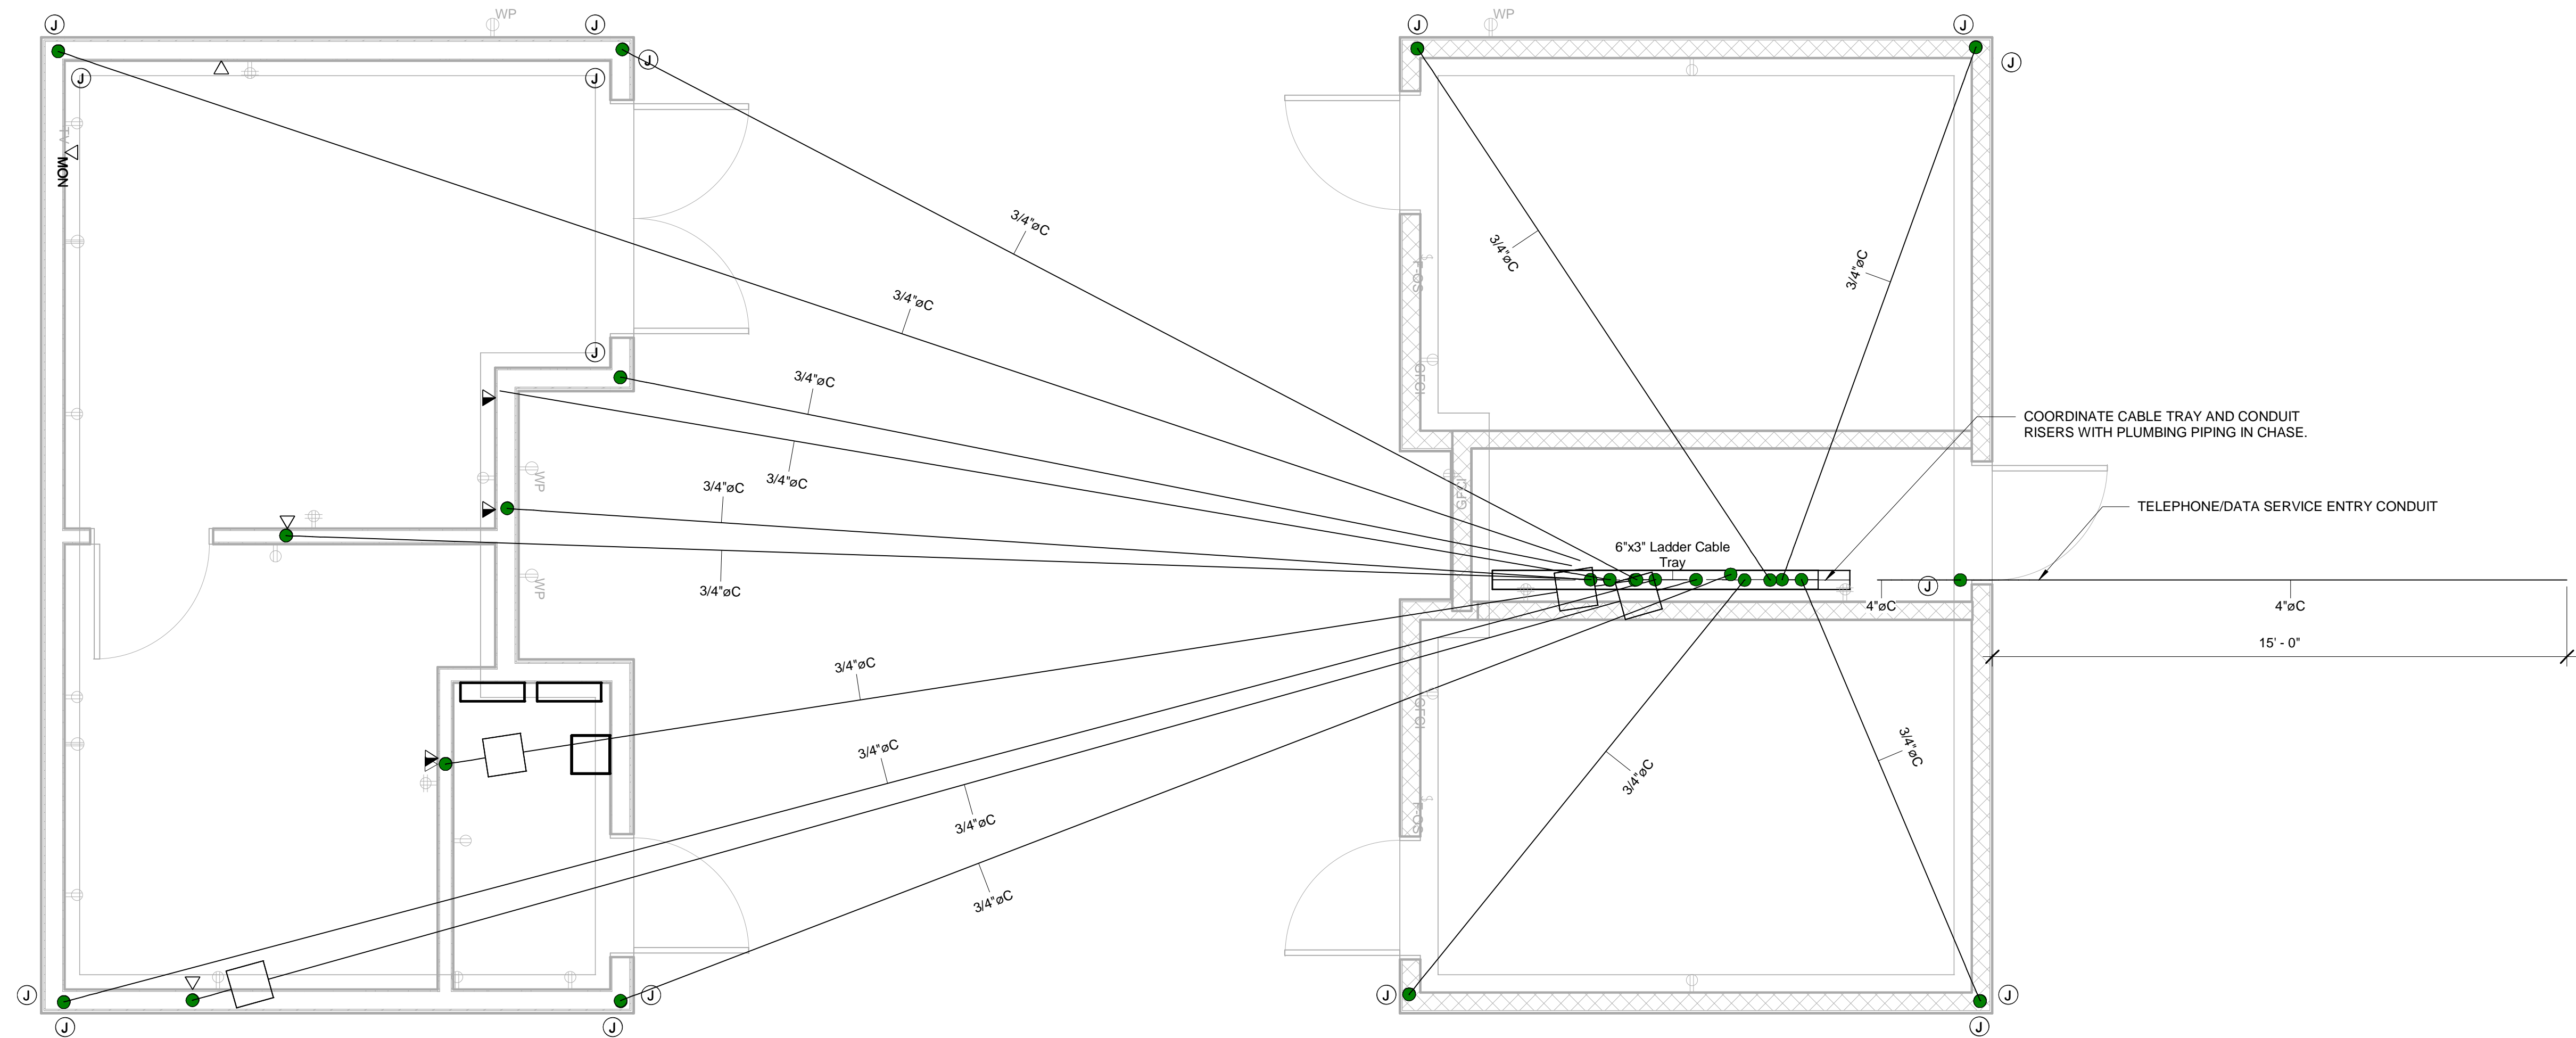

① Underground Conduit Layout  
3/8" = 1'-0"

A PROPOSED NEW CONSTRUCTION FOR  
THE AMERICAN LEGION PARK  
**GOLF HOUSE**  
841 N MILES ST  
ELIZABETHTOWN, KY 42701

REVISIONS

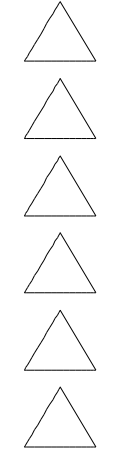

DOCUMENT PHASE  
CONSTRUCTION  
DOCUMENTS  
DATE ISSUED  
8/15/2017

SHEET NAME  
DATA  
CONDUIT  
LAYOUT

**E1.2**